

2J6615B-915

915 MHz ISM Screw Mount

Key Features

915 MHz ISM
- 902-928 MHz
Screw Mount
Low Profile
Ground Plane Dependent
Customized Cable and Connector
Dimensions 77.4 × 15 mm
Certificates: IP67, IP69K



1. Antenna and electrical specifications

Parameters	915 MHz ISM Antenna
Standards	ZigBee, ISM, SIGFOX, LoRa
Band (MHz)	915 MHz
Frequency (MHz)	902-928
Return Loss (dB)	~-13.5
VSWR	~1.5:1
Efficiency (%)	~33.5
Peak Gain (dBi)	~0.85
Average Gain (dB)	~-4.7
Impedance (Ohm)	50
Polarisation	Linear
Radiation Pattern	Omni-Directional
Max. Input Power (W)	25
Connector Type	Most RF Connectors (SMA-Male Standard)
Cable Length	Any Cable Length (300cm Standard)
Cable Type	Other Cables Available (RG174 Standard)

Antenna Measurement Conditions:

Mounted on 30x30 cm Metal Plate



200 cm RG174 Cable



Measured in Certified CTIA 3D Anechoic Chamber



2. Mechanical and environmental specifications

Specifications	2J6615B-915
Mounting Type	Screw Mount
Dimensions (mm)	77.4 x 15
Radome	PC/ABS UV Stable
Radome color	Black
Antenna Base	Zamak
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS
Certificates	IP67, IP69K


3. Antenna parameters

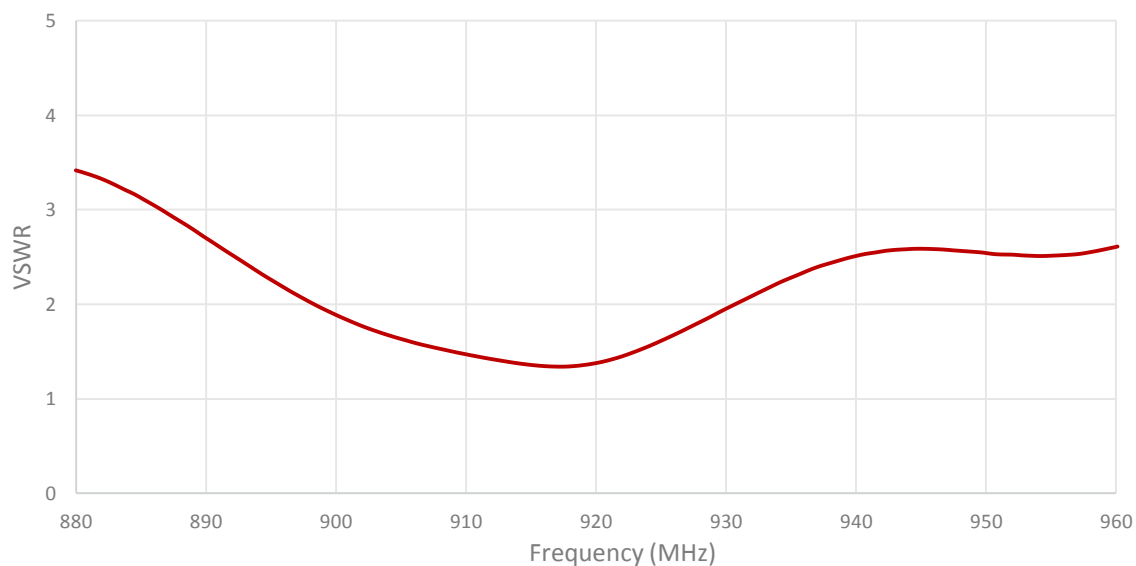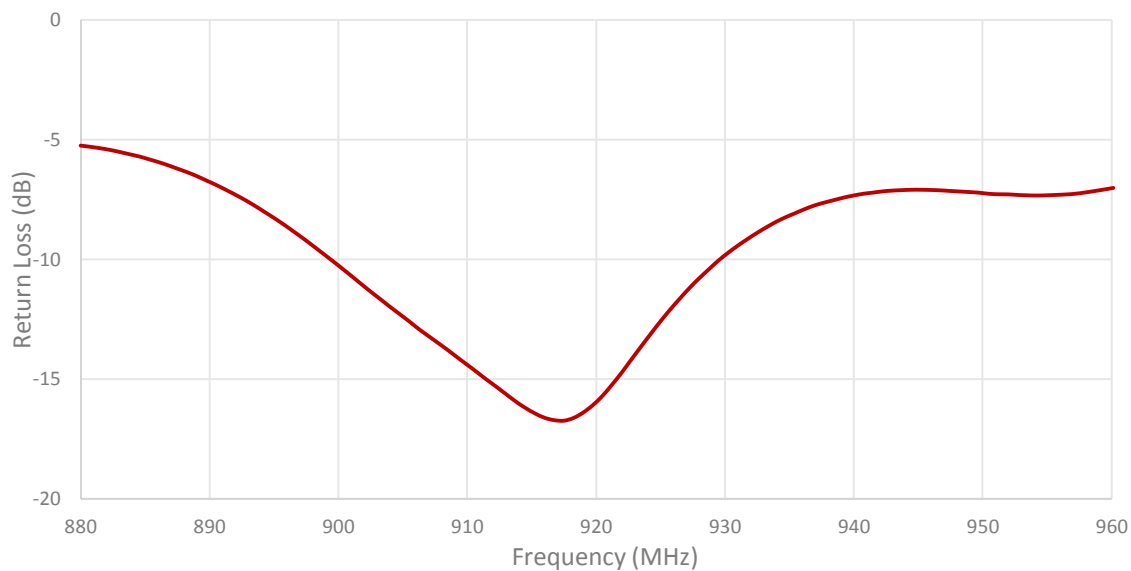

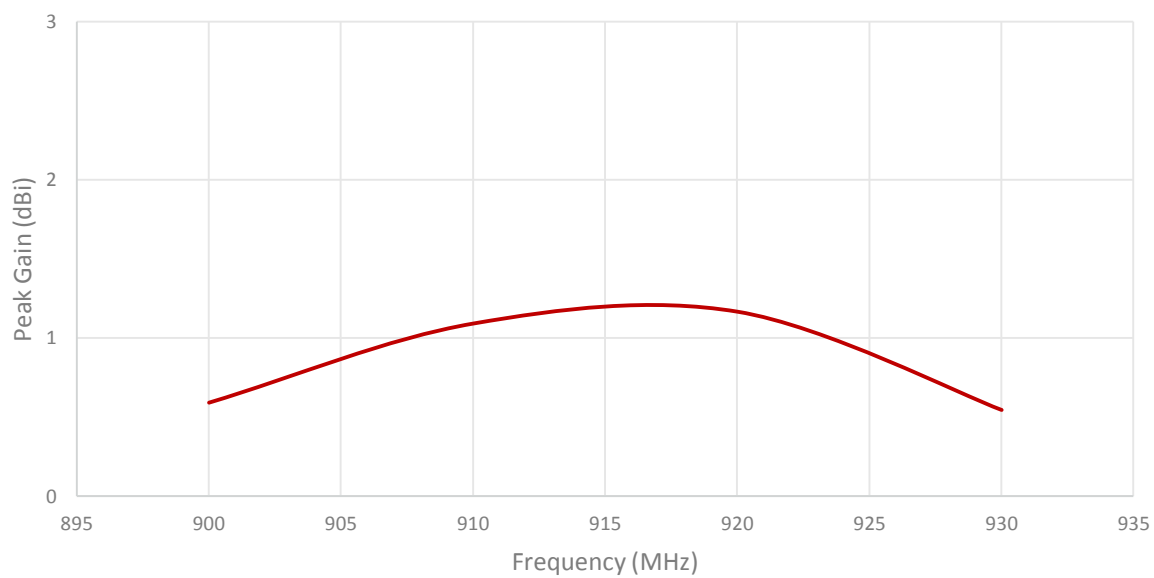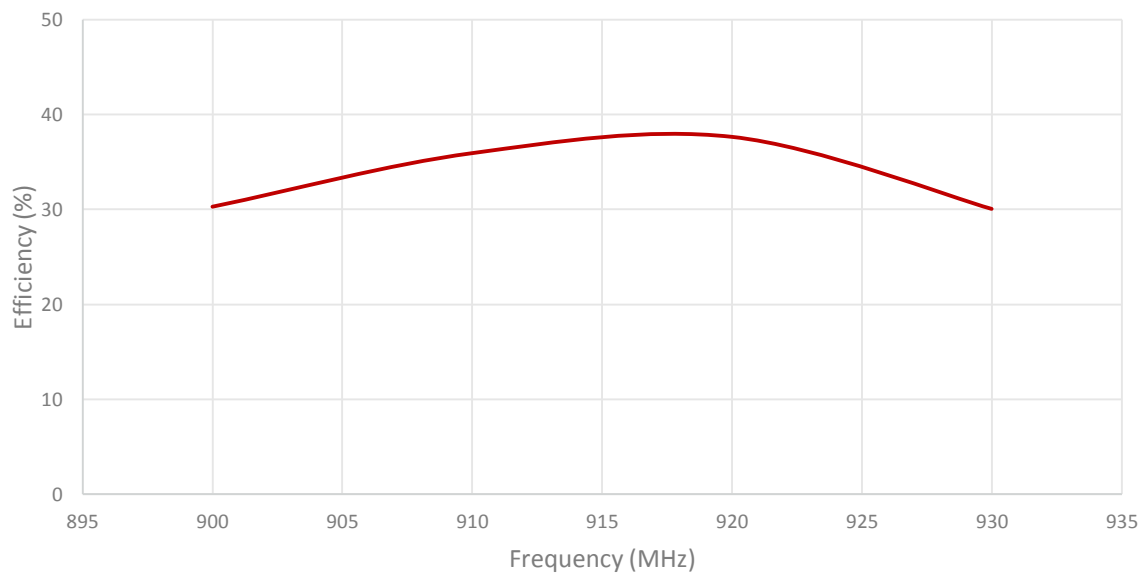

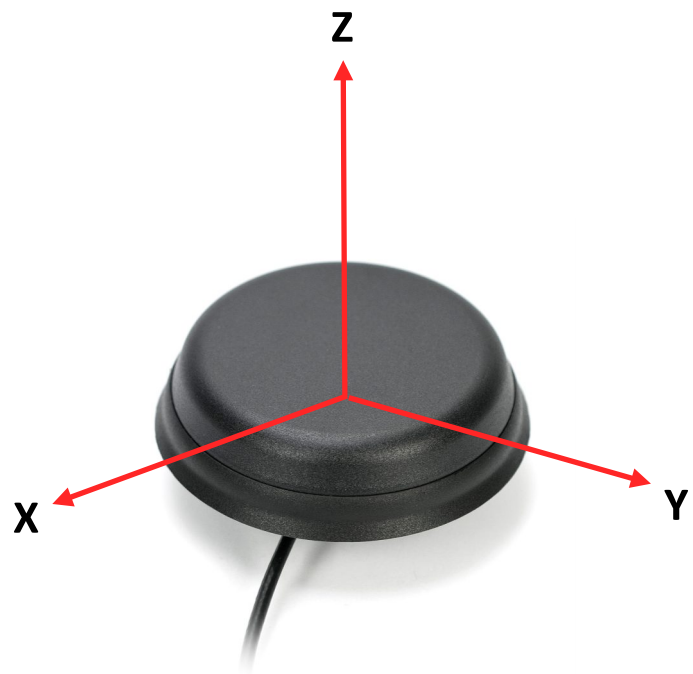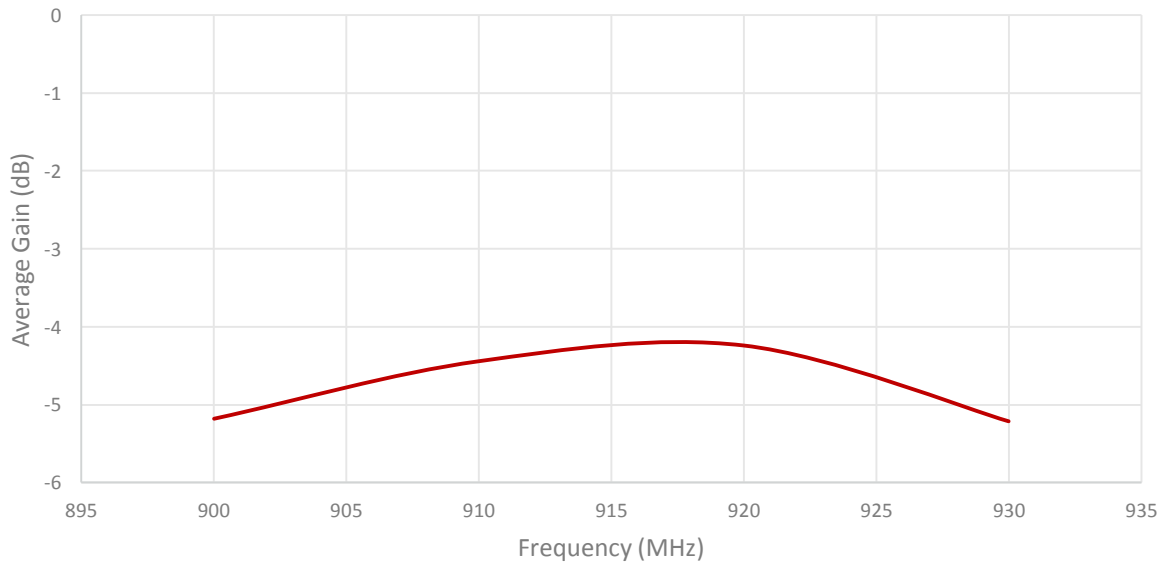


Radiation pattern reference

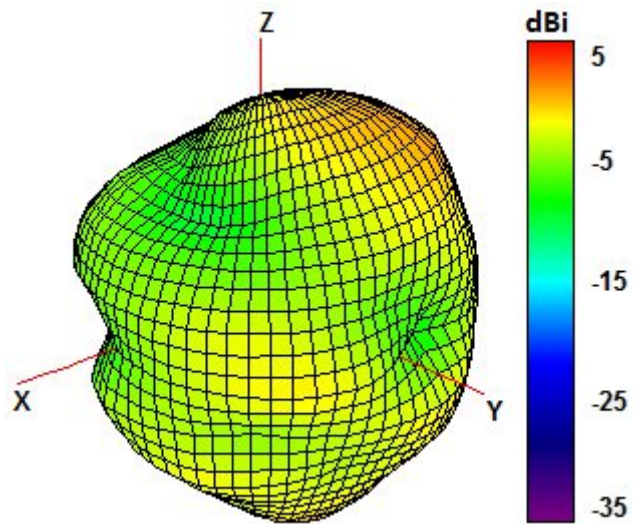

915 MHz Radiation pattern

4. Antenna drawings

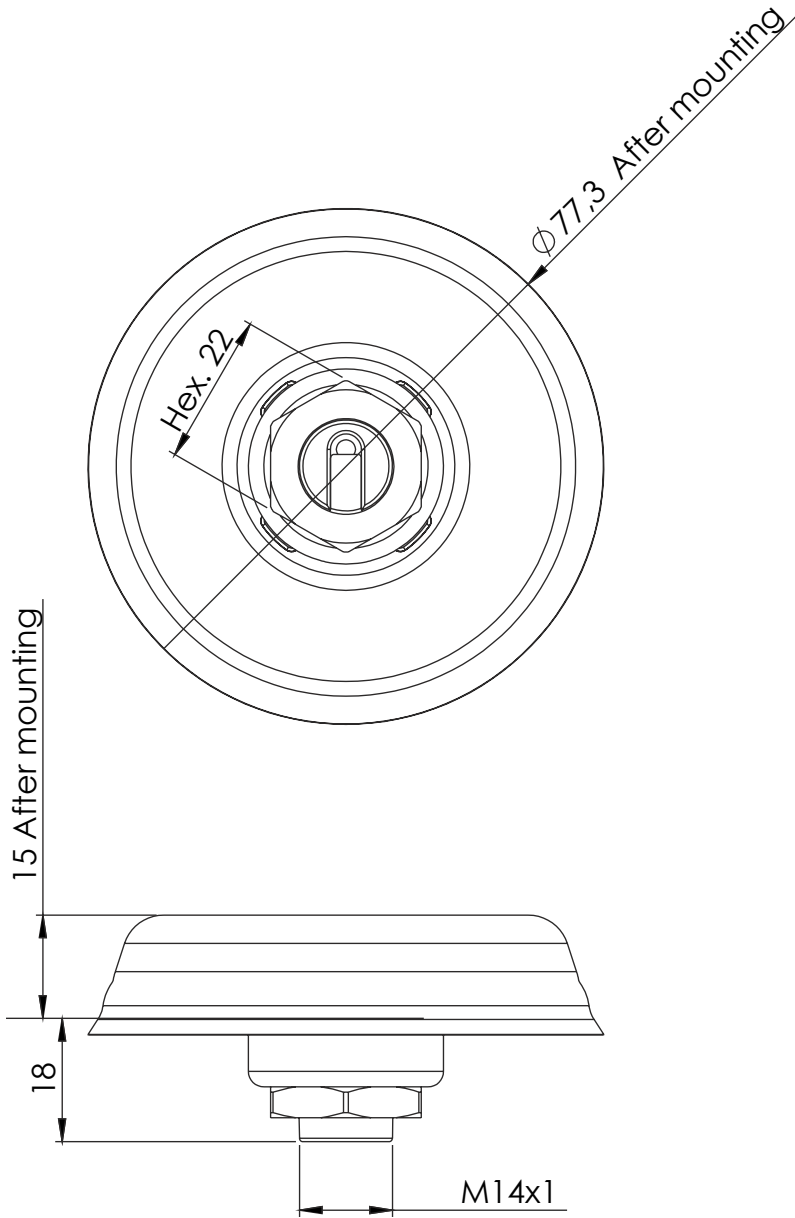

5. Antenna Images

